


TYPE RW90 WIRE

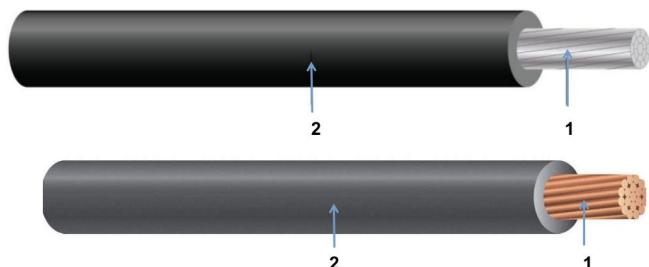

1. Conductor: annealed bare copper wires, or compact aluminum 8000 series wires, class B.
2. Insulation: Heat and moisture resistant, low temperature Cross-Linked Polyethylene (XLPE)

Type RW90, -40°C to +90°C

Colour Coding: Black; other colours available upon request.

Application:

For open wiring and raceways (except cable troughs and ventilated flexible cableway) in dry or wet locations.

For exposed wiring where exposed to weather with sunlight resistant insulation.

Approved for use with ceiling fixtures.

Standard: CSA Standard C22.2 No.38

Working temperature: -40°C to +90°C

Voltage: 600V, 1000V

Technical data, 600V

AWG	Strands (CU)	Insulation Thickness (mm)	Approx. OD (mm)	Approx. Weight (KG/km)
2	19	1.14	9.8	330
2/0	19	1.4	12.9	649
4/0	19	1.4	15.6	1,012

Technical data, 1000V

AWG	Strands (CU)	Insulation Thickness (mm)	Approx. OD (mm)	Approx. Weight (KG/km)
2	19	1.52	10.5	343
2/0	19	2.03	14.2	678
4/0	19	2.03	16.9	1,047